



STEP FLOW RATE REPORT




Pag. 1/2

PAFFONI RUBINETTERIA SPA - VIA SORISO 2, 28076 POGNO NO, ITALY

Component data

Client :	Paffoni	Model :	SK185CR
Category :	Miscelatore	Serial number :	120828
Line :	Stick	Test description :	Portata

Station 1

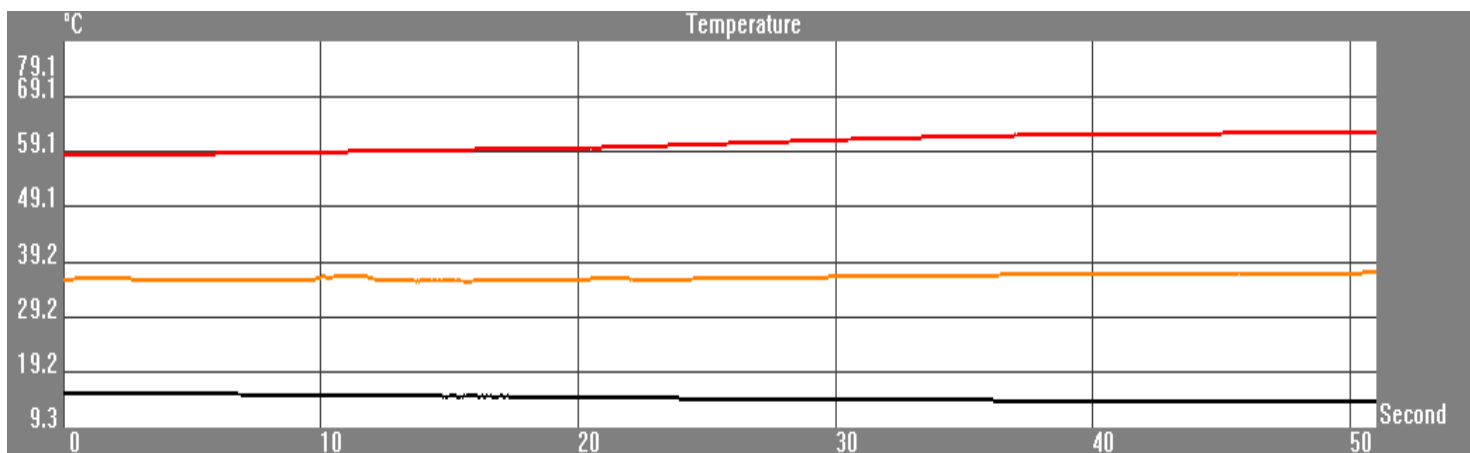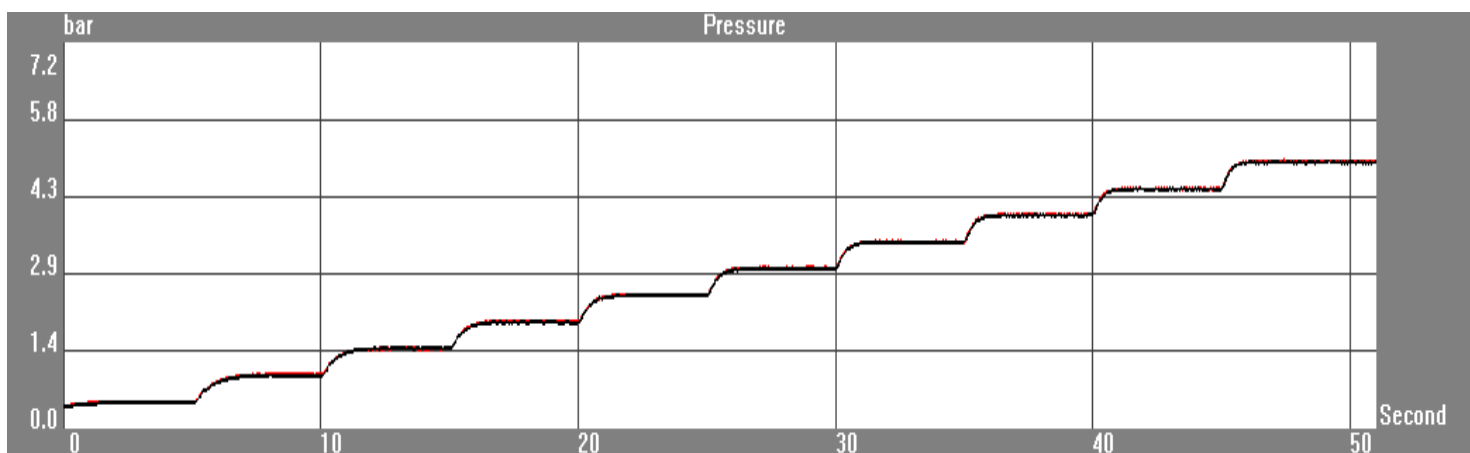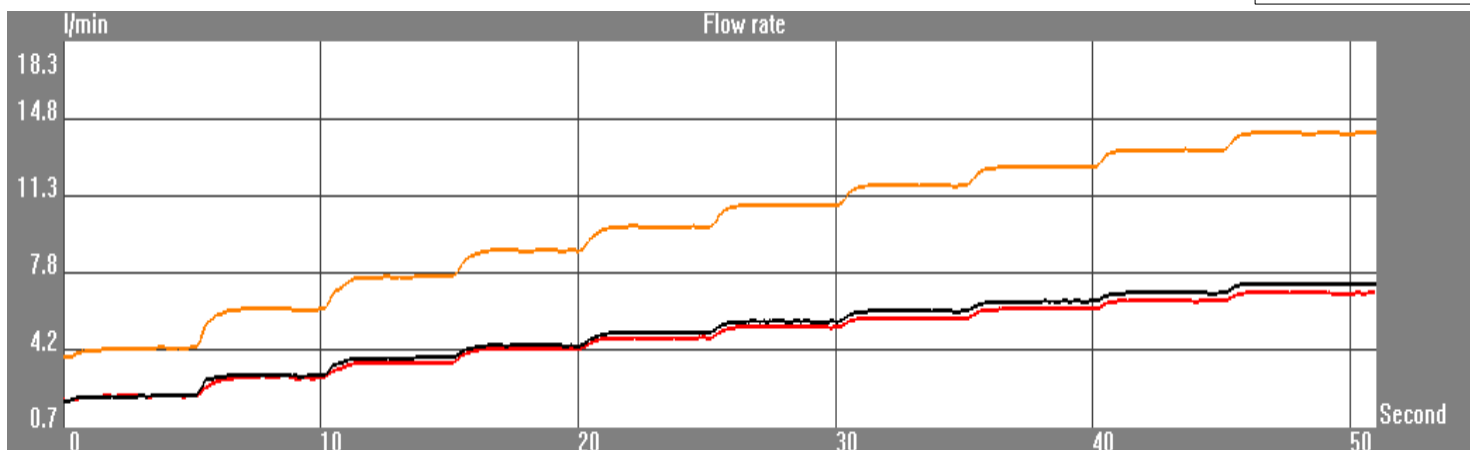

Start date : 28/08/2012 - 10.15

Operator : Ufficio Tecnico Paffoni

Test duration : 51 (Second)

Signature : _____



STEP FLOW RATE REPORT

Pag. 2/2

PAFFONI RUBINETTERIA SPA - VIA SORISO 2, 28076 POGNO NO, ITALY

Component data

Client :	Paffoni	Model :	SK185CR
Category :	Miscelatore	Serial number :	120828
Line :	Stick	Test description :	Portata

Test settings:

Station 1

Starting pressure:	0,50 bar	☒ Open hot
Step:	0,50 bar	☐ Open by-pass
Stabilisation time:	5 "	☒ Open cold
Steps number:	10	

Pitch	Hot pressure (bar)	Cold pressure (bar)	Hot flow rate (l/min)	Cold flow rate (l/min)	Mixed flow rate (l/min)	Mixed temperature (°C)
1	0,50	0,50	2,20	2,18	4,38	36,01
2	1,01	0,99	3,03	3,10	6,12	36,40
3	1,50	1,50	3,68	3,93	7,60	35,77
4	2,00	1,99	4,35	4,45	8,80	36,10
5	2,50	2,50	4,83	5,05	9,89	36,22
6	3,01	3,00	5,30	5,57	10,87	36,56
7	3,50	3,50	5,74	6,04	11,77	36,80
8	4,01	4,01	6,15	6,50	12,64	36,98
9	4,50	4,49	6,52	6,87	13,39	37,12
10	5,01	4,98	6,85	7,30	14,14	37,21

Notes: Apertura 100%
Componenti standard

Start date : 28/08/2012 - 10.15

Operator : Ufficio Tecnico Paffoni

Test duration : 51 (Second)

Signature : _____